

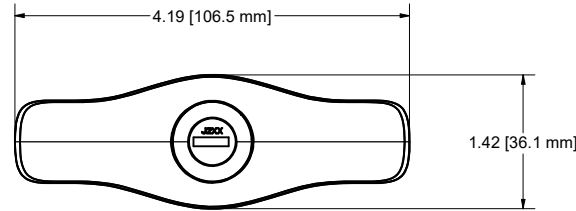
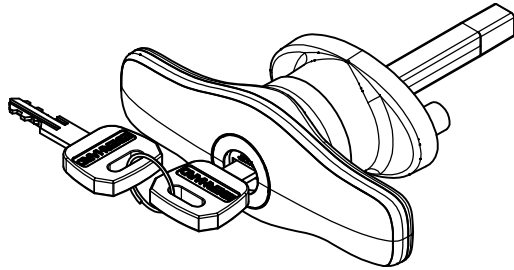
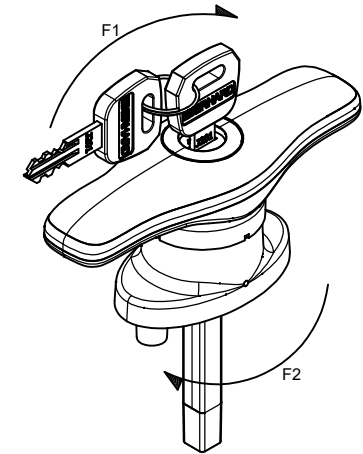


REVISION HISTORY					
REV	DESCRIPTION	EN	DATE	REV. BY	APVD. BY
-	RELEASE PER NPD 50087 REV 2	6155	6/21/2024	DJK	MR
1	MODIFIED VIEW & ADDED MTG HOLE PATTERN	6171	10/11/2024	DJK	MR

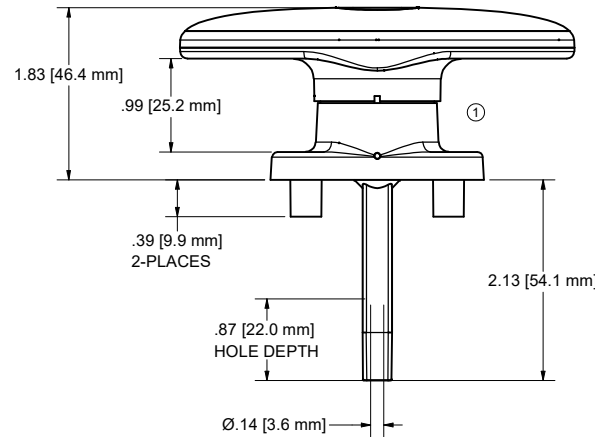

① RECOMMENDED MOUNTING HOLE PATTERN



FINISH CODE
KEY NUMBER


ORDER NOTES:

1. TO ORDER, PA501-CW-J2XX-MB
2. KEY NUMBERS AVAILABLE: J201-J210, J236
3. TWO KEYS SUPPLIED
4. EBERHARD AVAILABLE FINISH: (MB) MATTE BLACK

NOTES:

1. LOCKED 12 O'CLOCK POSITION SHOWN. UNLOCKED AT 3 O'CLOCK POSITION.
2. FILLED PLUG AND KEY CODES REFERENCE KEY CUTTING & COMBINATION DRAWING.
3. HANDLE 90 DEGREE CW ROTATION ONLY IN UNLOCK POSITION.
4. MATERIAL AND FINISH TO COMPLY WITH (EU) ROHS DIRECTIVE.
5. PACKAGING REFERENCE DRAWING.
6. ASSEMBLY PART COMPLY WITH THE FOLLOWING TESTS:

- 300Hrs SALT SPRAY ACC TO ASTM B117
- 300Hrs UV ACC TO ASTM G 154-16 1 CYCLE
- STATIC TESTING REQUIREMENTS:
 - TEMPERATURE RANGE FORM +80°C TO -30°C HUMIDITY(65%RH) DURATION (12H EACH)
 - F1)HANDLE MUST WITHSTAND A 25 lbf-ft TORQUE FORCE
 - F2)HANDLE BASE MUST WITHSTAND A 40 lbf-ft TORQUE FORCE

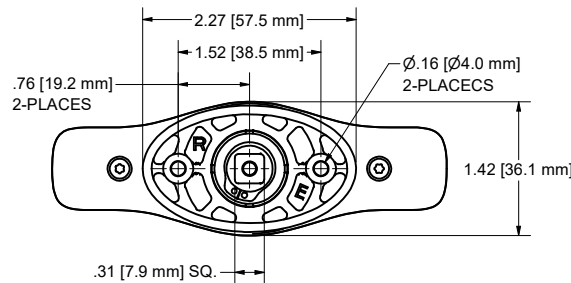

CUSTOMER PRINT

EBERHARD MANUFACTURING CO.

DIVISION OF
THE EASTERN COMPANY
CLEVELAND, OHIO 44149-9712

LOCKING T-HANDLE CW

MATERIAL

PART NUMBER

PA501-CW

THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5-2009			
LINEAR MEASUREMENT: INCH [MM]		DATE	NAME
UNLESS OTHERWISE SPECIFIED		6/21/2024	
TOLERANCES ARE AS FOLLOWS:		DRAWN BY	
ANGLES:	± .2°	SCALE	1:1
2 PLACE DEC:	± .03	CHK. BY	
3 PLACE DEC:	± .015		
ALL HOLES:	± .005		